


There are no translations available.

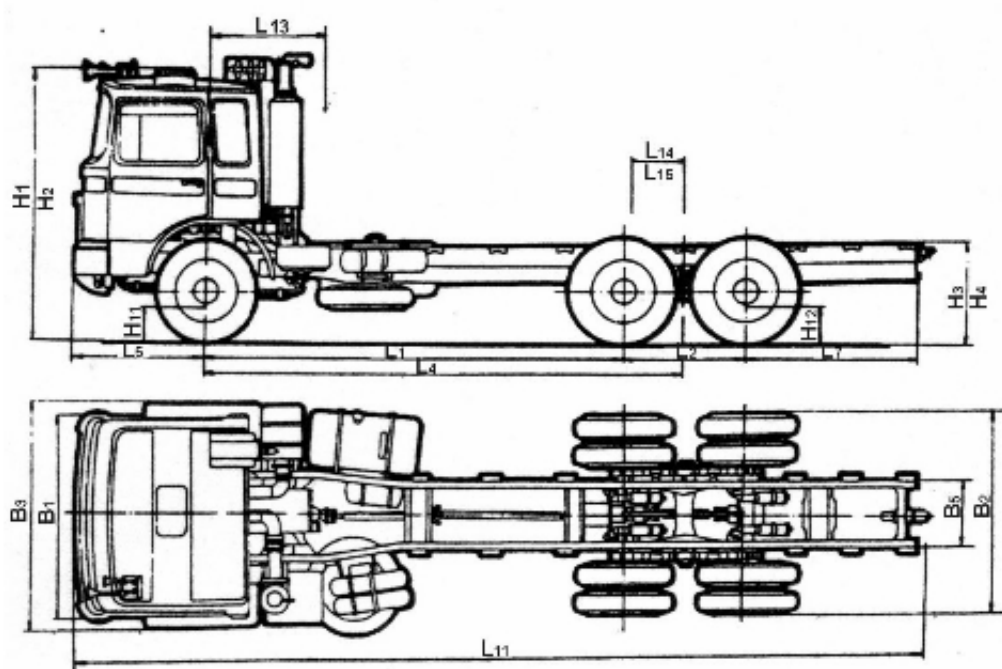

LENGTHS (mm)

L1 Wheelbase between axle 1 and 2	3 840
L2 Wheelbase between axle 2 and 3	1 370
L5 Front overhang	1 500
L6 Rear chassis overhang	

2 075

L11 Total length

8 785

L13 Distance between front axle and superstructure

800

L14/L15 Distance from twin axle center to the superstructure center of gravity max / min.

375/325

L19 Total permissible length of superstructure

6 250

WIDTHS (mm)

B1 Cabin width

2 300

B2 Width over rear wheels

2 460

B3 Overall width

2 500

B4 Width of chassis frame front

942

B5 Width of chassis frame rear

762

B6 Min. turning circle diameter (m)

16,00

B7 Min. turning clearance circle diameter (m)

17,80

HEIGHTS (mm)

H1 Total height over cabin, unloaded

3 110

H2 Total height over cabin, loaded

3 050

H3 Chassis frame height, unloaded

995

H4 Chassis frame height, loaded

960

H11 Ground clearance, front

320

H12 Ground clearance, rear

330

WEIGHTS (kg)

G1 Permissible weight on axle 1

6 500

G2 Permissible weight on axle 2	8 000
G3 Permissible weight on axle 3	8 000
G5 Total permissible weight	22 000
G6 Chassis truck net weight	9 600
G7 Chassis truck weight on front axle	5 100
G8 Chassis truck weight on rear axles	4 400
G9 Chassis truck carrying capacity	12 400
G12 Gross combination weight	-

PERFORMANCES

Maximum kinematic speed (km/h)	97
Maximum ASR limited speed (km/h)	85
Maximum climbing ability (%)	30