

There are no translations available.



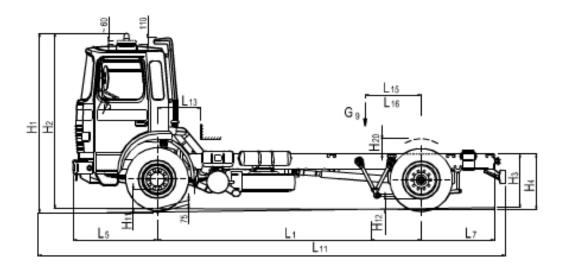

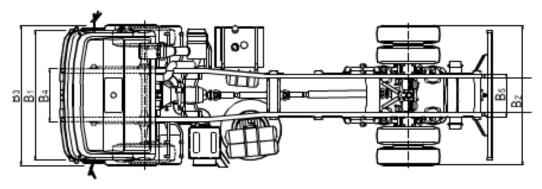

LENGTHS (mm)

L1 Wheelbase

3 700

L5 Front overhang

	1 500	
L6 Rear overhang	1 285	
L7 Rear chassis overhang		
L11 Total length	1 100	
L13 Distance between front axle and sup	6 485 perstructure	
820		
	e superstructure center of gravity max / min. 10/790	
WIDTHS (mm)		
B1 Cabin width		
B2 Width over rear wheels	2 300	
B2 Width Over real wheels	2 462	
B3 Overall width		
B4 Width of chassis frame front	2 500	
	940	
B5 Width of chassis frame rear	760	
B6 Min. turning circle diameter (m)		
B7 Min. turning clearence circle diamete	13,80 r (m)	
HEIGHTS (mm)	15,20	
H1 Total height over cabin, unloaded	3 210	
H2 Total height over cabin, loaded	0.105	
H3 Chassis height, unloaded	3 135	
H4 Chassis height, loaded	995	
	960	
H11 Ground clearence, front	285	
H12 Ground clearence, rear	200	
H20 Max. lift up of the rear wheel	380	
WEIGHTS (kg)	274	

G1 Permissible weight on front axle	
Ğ	7 000
G2 Permissible weight on rear axle	11 500
G5 Total permissible weight	11 000
G6 Chassis truck not woight	18 000
G6 Chassis truck net weight	6 180
G7 Chassis truck weight on front axle	4.005
G8 Chassis truck weight on rear axles	4 085
Ğ	2 095
G9 Chassis truck carrying capacity	11 820
PERFORMANCES	020
Maximum kinematic speed (km/h)	
Marriagorous ACD limited as and (loss /le)	111
Maximum ASR limited speed (km/h)	85
Maximum climbing ability (%)	
	30