


There are no translations available.

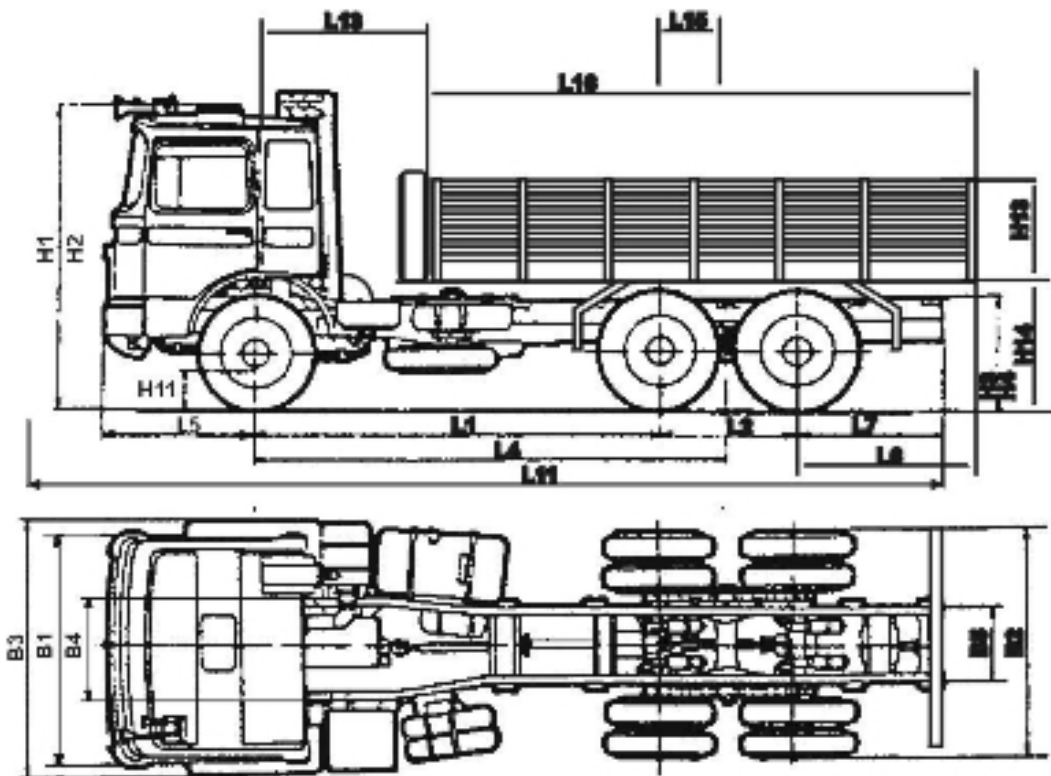

**LENGTHS (mm)**

L1 Wheelbase between axel 1 and 2	3 840
L2 Wheelbase between axel 2 and 3	1 370
L5 Front overhang	

	1 700
L6 Rear overhang	
	1 090
L7 Rear chassis overhang	
	725
L11 Total length	
	8 000
L13 Distance between front axle and superstructure	
	1 700
L15 Minim level of superstructure mass point	
	520
L16 Superstructure length	
	4 560

**WIDTHS (mm)**

B1 Cabin width	
	2 300
B2 Width over rear wheels	
	2 460
B3 Overall width	
	2 500
B4 Width of chassis frame front	
	946
B5 Width of chassis frame rear	
	766
B7 Min. turning circle diameter (m)	
	20,90
B8 Min. turning clearance circle diameter (m)	
	22,10

**HEIGHTS (mm)**

H1 Total height over cabin, unloaded	
	3 430
H2 Total height over cabin, loaded	
	3 370
H3 Chassis height, unloaded	
	1 480
H4 Chassis height, loaded	
	1 440
H11 Ground clearance, front	
	330
H12 Ground clearance, rear	
	330

## WEIGHTS (kg)

G1 Permissible weight on front axle	7 500
G2 Permissible weight on axle 2 and 3	2x9 500
G5 Total permissible weight	26 000
G6 Chassis truck net weight (aprox)	13 120
G7 Chassis truck weight on axle 1	6 230
G8 Chassis truck weight on rear axles	6 890
G12 Chassis truck carrying capacity	12 880
G13 Towing weight	40 000
G14 Total weight solo, technical permissible	33 000
G15 Gross combination weight	90 000

## PERFORMANCES

Maximum kinematic speed (km/h)	86
Maximum climbing ability (%)	30