
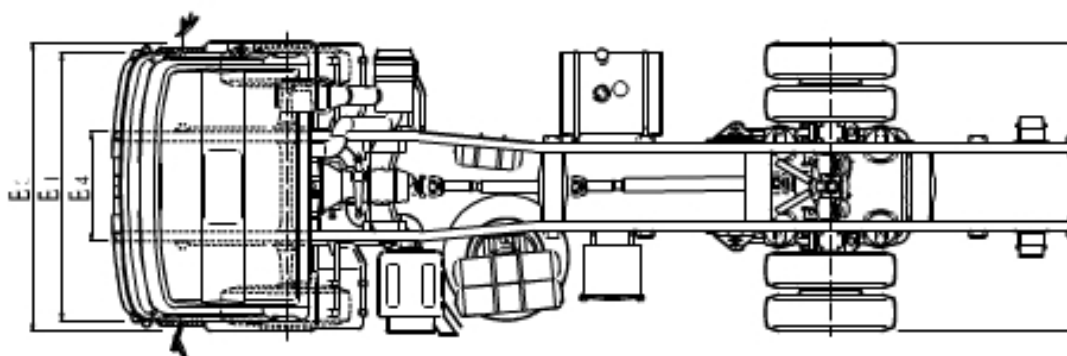


There are no translations available.

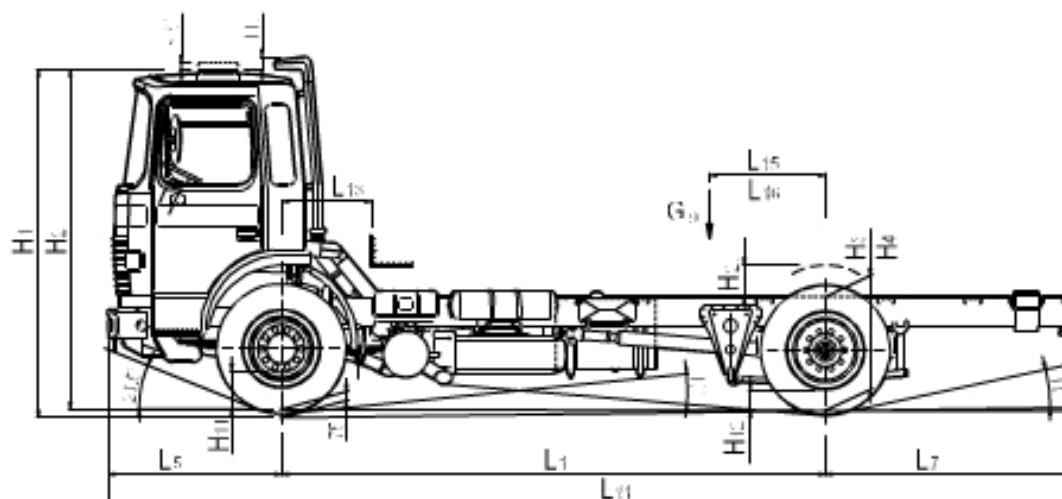

LENGTHS (mm)

L1 Wheelbase

4 700

L5 Front overhang	1 500
L6 Rear overhang	2 385
L7 Rear chassis overhang	2 200
L11 Total length	8 585
L13 Distance between front axle and superstructure	980
L15 Distance from twin axle center to the superstructure center of gravity max.	1 080
L16 Distance from twin axle center to the superstructure center of gravity min.	880

WIDTHS (mm)

B1 Cabin width	2 300
B2 Width over rear wheels	2 462
B3 Overall width	2 500
B4 Width of chassis frame front	942
B5 Width of chassis frame rear	762
B6 Min. turning circle diameter (m)	16,32
B7 Min. turning clearance circle diameter (m)	17,13

HEIGHTS (mm)

H1 Total height over cabin, unloaded	3 000
H2 Total height over cabin, loaded	2 925
H3 Chassis height, unloaded	981
H4 Chassis height, loaded	981
H11 Ground clearance, front	315
H12 Ground clearance, rear	

H20 Max. lift up of the rear wheel	180
	274

WEIGHTS (kg)

G1 Permissible weight on front axle	7 000
G2 Permissible weight on rear axle	11 500
G5 Total permissible weight	18 000
G6 Chassis truck net weight	6 750
G7 Chassis truck weight on front axle	4 650
G8 Chassis truck weight on rear axles	2 100
G9 Chassis truck carrying capacity	11 250
G12 Gross combination weight	26 000

PERFORMANCES

Maximum kinematic speed (km/h)	102
Maximum ASR limited speed (km/h)	85
Maximum climbing ability (%)	30