
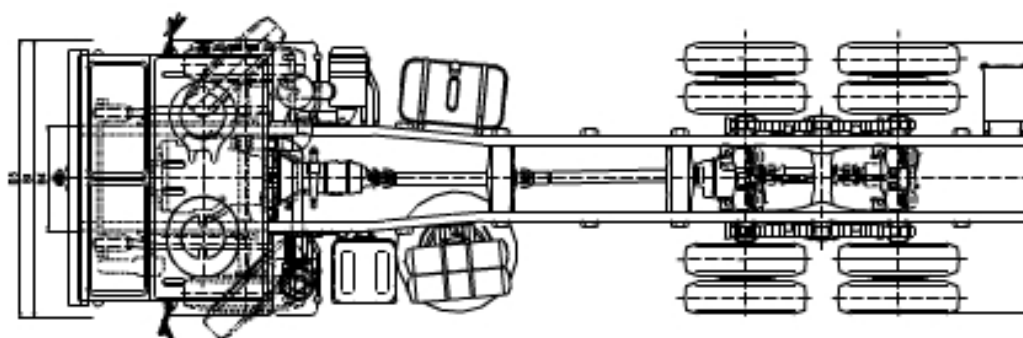


There are no translations available.

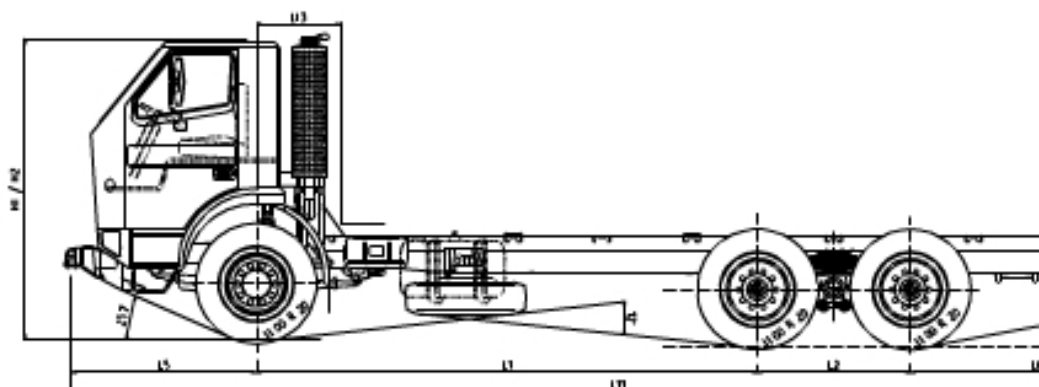

**LENGTHS (mm)**

L1 Wheelbase between axle 1 and 2

4 490

L2 Wheelbase between axle 2 and 3

1 370

L5 Front overhang

1 500

L6 Rear chassis overhang	2 265
L11 Total length	9 625
L13 Distance between front axle and superstructure	750
L14/L15 Distance from twin axle center to the superstructure center of gravity max / min.	550/400

**WIDTHS (mm)**

B1 Cabin width	2 300
B2 Width over rear wheels	2 422
B3 Overall width	2 500
B4 Width of chassis frame front	942
B5 Width of chassis frame rear	762
B6 Min. turning circle diameter (m)	17,60
B7 Min. turning clearance circle diameter (m)	19,30

**HEIGHTS (mm)**

H1 Total height over cabin, unloaded	2 810
H2 Total height over cabin, loaded	2 770
H3 Chassis height, unloaded	1 100
H4 Chassis height, loaded	990
H11 Ground clearance, front	300
H12 Ground clearance, rear	320

**WEIGHTS (kg)**

G1 Permissible weight on axle 1	6 500
---------------------------------	-------

G2 Permissible weight on axle 2	10 000	
G3 Permissible weight on axle 3	10 000	
G5 Total permissible weight	26 000	
G6 Chassis truck net weight		8 750
G7 Chassis truck weight on axle 1	4 650	
G8 Chassis truck weight on rear axles	4 100	
G9 Chassis truck carrying capacity	17 250	
G11 Gross combination weight	-	

**PERFORMANCES**

Maximum kinematic speed (km/h)	91
Maximum climbing ability (%)	30