
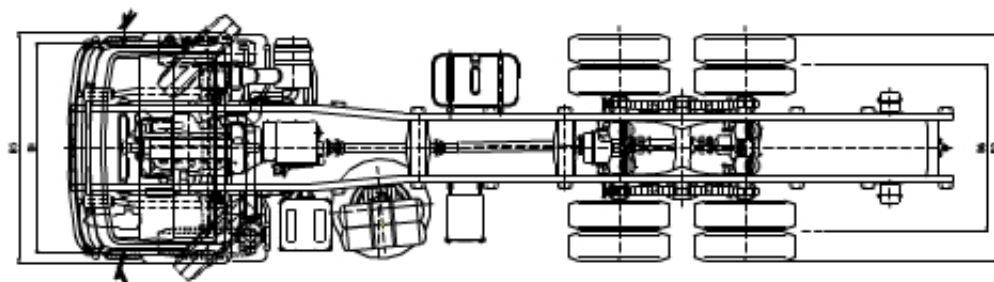


There are no translations available.

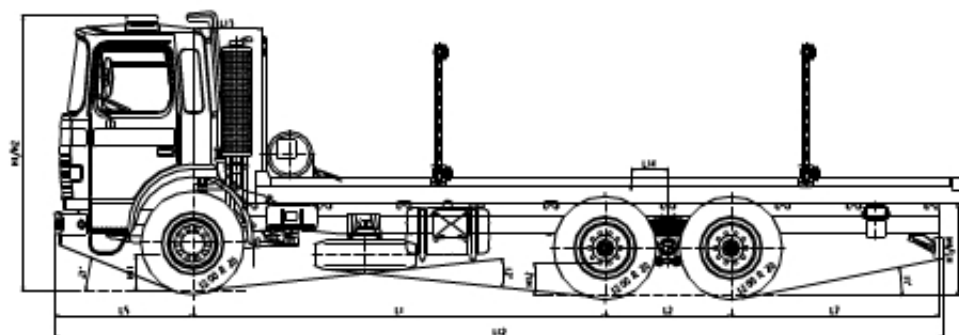

LENGTHS (mm)

L1 Wheelbase	4 490
L5 Front overhang	1 370
L6 Rear overhang	1 500
L7 Rear chassis overhang	

	2 340
L11 Total length	
	9 700
L13 Distance between front axle and superstructure	
	900
L14 Distance from twin axle center to the superstructure center of gravity max / min.	
	650/510
L16 Superstructure maximum length	
	7 530

WIDTHS (mm)

B1 Cabin width	
	2 300
B2 Width over rear wheels	
	2 460
B3 Overall width	
	2 500
B4 Width of chassis frame front	
	1 800
B7 Min. turning circle diameter (m)	
	16,0
B8 Min. turning clearance circle diameter (m)	
	17,8

HEIGHTS (mm)

H1 Total height over cabin, unloaded	
	3 110
H2 Total height over cabin, loaded	
	3 050
H3 Chassis height, unloaded	
	1 400
H4 Chassis height, loaded	
	1 350
H11 Ground clearance, front	
	300
H12 Ground clearance, rear	
	330
H20 Max. lift up of the rear wheel	
	115

WEIGHTS (kg)

G1 Permissible weight on axle 1	7 500
G2 Permissible weight on axle 2	9 500

G3 Permissible weight on axle 3	9 500
G5 Total permissible weight	26 000
G6 Chassis truck net weight	10 500
G7 Chassis truck weight on front axle	5 500
G8 Chassis truck weight on rear axles	5 000
G9 Chassis truck carrying capacity	15 500
G12 Gross combination weight	-

PERFORMANCES

Maximum speed (km/h)	87
Maximum climbing ability (%)	28