


There are no translations available.

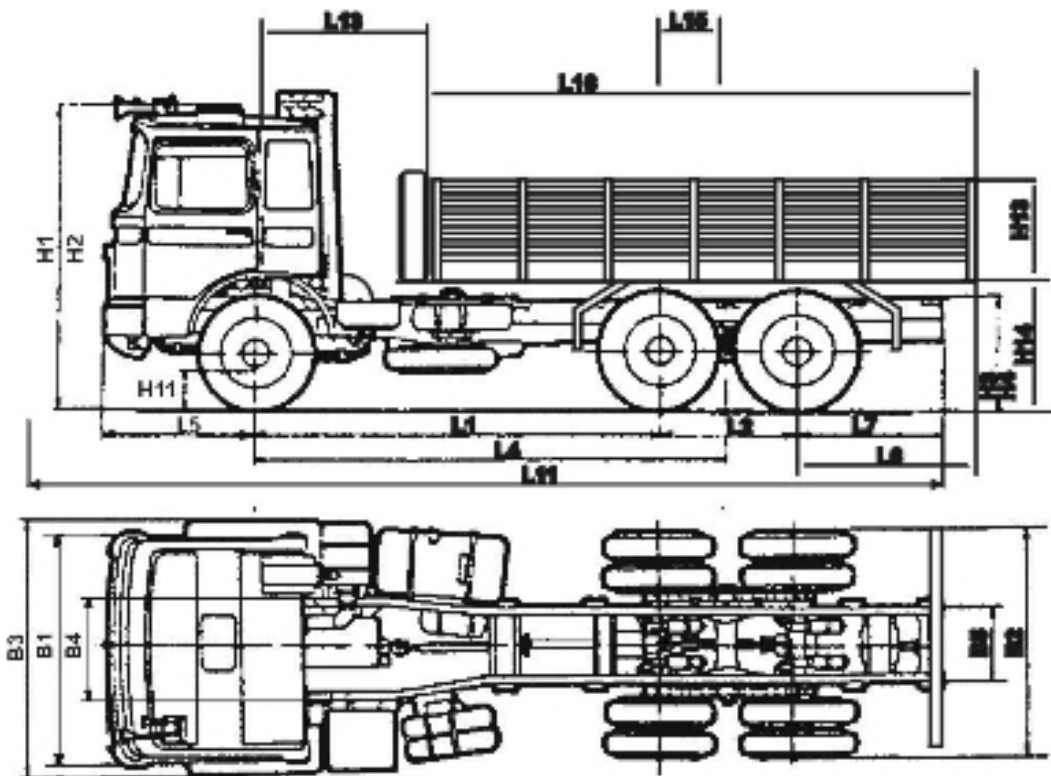

LENGTHS (mm)

L1 Wheelbase between axel 1 and 2	3 840
L2 Wheelbase between axel 2 and 3	1 370
L5 Front overhang	

	1 700
L6 Rear overhang	
	1 090
L7 Rear chassis overhang	
	725
L11 Total length	
	8 000
L13 Distance between front axle and superstructure	
	1 700
L15 Minim level of superstructure mass point	
	520
L16 Superstructure length	
	4 560

WIDTHS (mm)

B1 Cabin width	
	2 300
B2 Width over rear wheels	
	2 460
B3 Overall width	
	2 500
B4 Width of chassis frame front	
	946
B5 Width of chassis frame rear	
	766
B7 Min. turning circle diameter (m)	
	20,90
B8 Min. turning clearance circle diameter (m)	
	22,10

HEIGHTS (mm)

H1 Total height over cabin, unloaded	
	3 430
H2 Total height over cabin, loaded	
	3 370
H3 Chassis height, unloaded	
	1 480
H4 Chassis height, loaded	
	1 440
H11 Ground clearance, front	
	330
H12 Ground clearance, rear	
	330

WEIGHTS (kg)

G1 Permissible weight on front axle	7 500
G2 Permissible weight on axle 2 and 3	2x9 500
G5 Total permissible weight	26 000
G6 Chassis truck net weight (aprox)	13 120
G7 Chassis truck weight on axle 1	6 230
G8 Chassis truck weight on rear axles	6 890
G12 Chassis truck carrying capacity	12 880
G13 Towing weight	40 000
G14 Total weight solo, technical permissible	33 000
G15 Gross combination weight	90 000

PERFORMANCES

Maximum kinematic speed (km/h)	86
Maximum climbing ability (%)	30